




221 Series LEVER-NUTS® Inline Splicing Connector

Connect All Conductor Types Without Tools



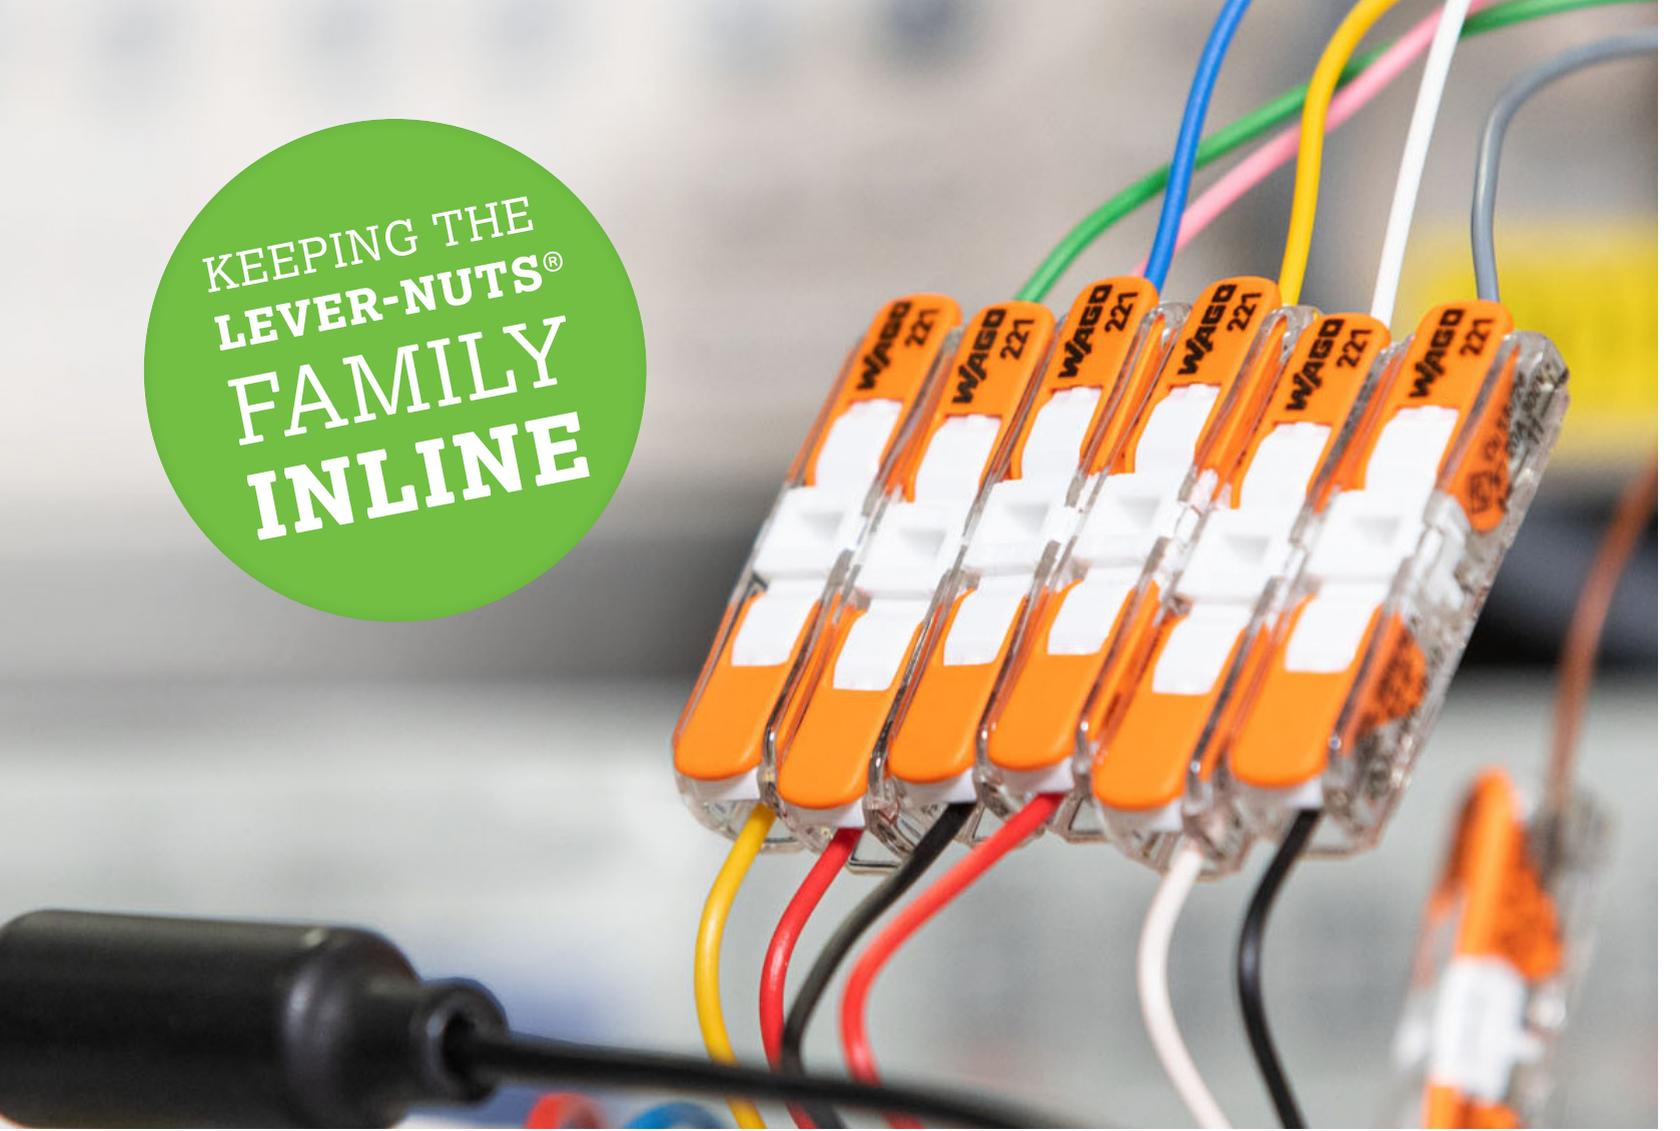

KEEPING THE
LEVER-NUTS®
FAMILY
INLINE

LEVER-NUTS® Inline Splicing Connector

Slim Design and Tool-Free Terminations

The new 221 Series Inline Splicing Connector with levers combines all the trusted advantages of the 221 Series Splicing Connectors in a slim design. Offering unsurpassed simplicity, speed and reliability, the 221 Series provides universal conductor connections – with lever technology that eliminates tools – while offering a visibly secure conductor contact.

Where multiple poles are required, optional adapters provide completely modular mounting. Get the flexibility of having up to five fixed-position poles in one adapter (with or without strain relief) for adhesive, tie-on or suspended mounting or placed on a DIN Rail with a screw or snap-in Mounting foot.

Your Benefits:

- Connecting solid, stranded & fine-stranded conductors from 12 to 20 AWG in the feedthrough direction
- Slim design minimizes dimensions for installation in tight spaces
- Tool-free connection and disconnection thanks to convenient lever technology
- Choosing between fixed-position installation & multi-pole installation with an adapter

Technical Specifications

Inline Splicing Connectors with Levers

Item Number	221-2401
Designation	Max. 12 AWG / 4 mm ²
Color	Transparent housing, white cover

Approvals

EN 60998	
Cross sectional area	solid: 0.2 ... 4 mm ²
	stranded: 0.2 ... 2.5 mm ²
	fine-stranded: 0.34 ... 4 mm ²
Nominal current	32 A
Nominal voltage	450 V
UL 486C	
Cross sectional area	20 ... 12 AWG, solid
	18 ... 12 AWG, stranded
Nominal current	20 A
Nominal voltage	600 V
PSE JET	
Cross sectional area	Ø 1.6; Ø 2.0 mm
Nominal current	20 A
Nominal voltage	300 V



SCAN HERE
TO ORDER A SAMPLE



Accessories

Mounting Carrier with Strain Relief				Mounting Carrier without Strain Relief			
For Screw Mount		With Snap-In Foot		For Screw Mount		For Snap-In Foot	
1-way	221-2501	1-way	221-2511	1-way	221-2521	1-way	221-2531
2-way	221-2502	2-way	221-2512	2-way	221-2522	2-way	221-2532
3-way	221-2503	3-way	221-2513	3-way	221-2523	3-way	221-2533
4-way	221-2504	4-way	221-2514	4-way	221-2524	4-way	221-2534
5-way	221-2505	5-way	221-2515	5-way	221-2525	5-way	221-2535

Item Number	Designation	Compatibility	Application	Width
209-120	Mounting foot	for DIN-35 rail	Snap on carrier with snap-in mounting foot	6.4 mm
209-123	Mounting foot with screw	for DIN-35 rail	Screw on carrier with mounting flange	6.4 mm
209-119	Mounting screw	for mounting foot (209-120)		
209-1115	Mounting foot	for DIN-15 rail	Snap on carrier with snap-in mounting foot	6.4 mm
209-1116	Mounting foot with screw	for DIN-15 rail	Screw on carrier with mounting flange	6.4 mm